

JF SERIES CONSTRUCTION

Triples plunger pump, available in 5 versions.

Low-high pressure packing design with integrated cooling system.



High volumetric efficiency suction/delivery valves featuring new spherical design of sealing areas.

Splash lubrication.

Flushing systems available on request on selected versions.



JF SERIES

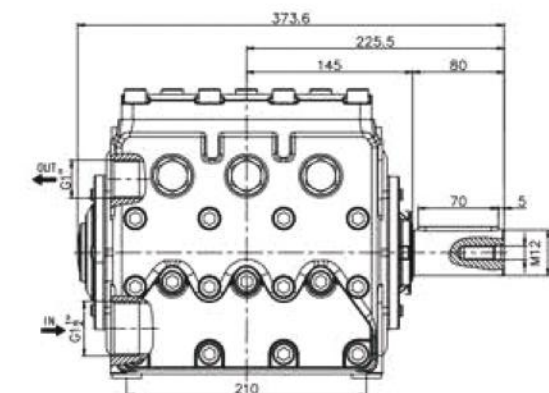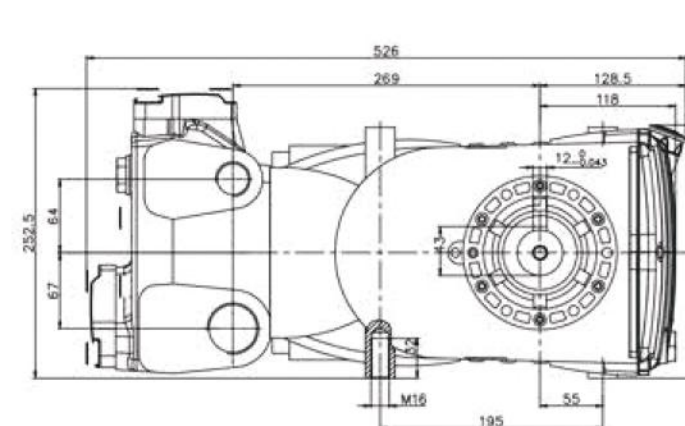

Tipo pompa Pump type	Portata Volume		Pressione Pressure			g/min	Potenza Power		Peso Weight	Dimensions
	l/min	US Gpm	bar	Mpa	p.s.i.	r.p.m	hp	kW	kg	mm
JF28	93	24.5	210	21	3045	1000	50	37.0	69	526×374×253
JF30	106	28.0	200	20	2900	1000	55	40.0	69	526×374×253
JF32	120	31.7	180	18	2610	1000	56	41.2	69	526×374×253
JF36	122	32.2	160	16	2300	800	50	37.0	69	526×374×253
	137	36.2	140	14	2050	900	50	37.0		
	153	40.0	130	13	1900	1000	52	38.2		
JF40	170	45.0	110	11	1600	900	49	36.0	69	526×374×253