

jf

JET FLOW

JV SERIES

CONSTRUCTION

Triplex plunger pump, available in 3 versions.

Low-high pressure packing design with integrated cooling system.

High volumetric efficiency suction/delivery valves featuring new spherical design of sealing areas.

Splash lubrication.



External gear box available in 3 ratios and positionable on left or right side of the pump.

Drain valve kit.

Flushing systems available on request on selected versions.



JV SERIES

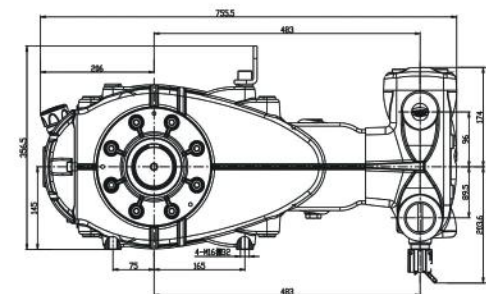

Tipo pompa Pump type	Portata Volume		Pressione Pressure			Con riduttore With gearbox	Potenza Power		Peso Weight	Dimensions
	l/min	US Gpm	bar	Mpa	p.s.i.		hp	kW		
JV32	168	44.3	250	25	3625	1000	115	85	209	756×480×415
JV36	213	56.2	200	20	2900	1000	115	85	209	756×480×415
JV40	263	69.4	160	16	2320	1000	115	85	209	756×480×415

Tipo pompa Pump type	Portata Volume		Pressione Pressure			Con riduttore With gearbox	Potenza Power		Peso Weight	Dimensions
	l/min	US Gpm	bar	Mpa	p.s.i.		hp	kW		
JV45	333	87.9	125	12.5	1812	1000	115	85	209	756×480×415
JV50	412	108.8	105	10.5	1522	1000	115	85	209	756×480×415
JV55	498	131.5	85	8.5	1232	1000	115	85	209	756×480×415