

CONSTRUCTION

Triplex plunger pump, available in 3 versions.

Low-high pressure packing design with integrated cooling system.

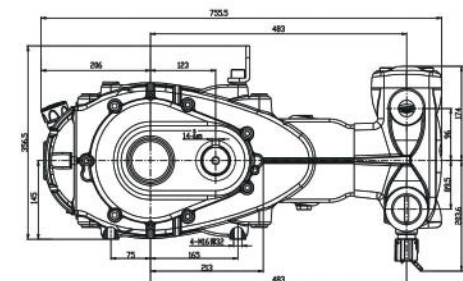
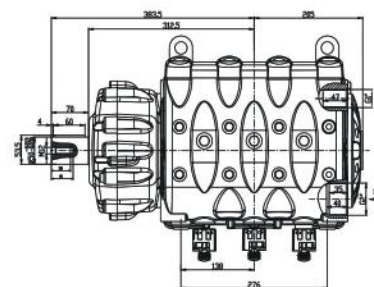
High volumetric efficiency suction/delivery valves featuring new spherical design of sealing areas.

Splash lubrication.

External gear box available in 3 ratios and positionable on left or right side of the pump.

Drain valve kit.

Flushing systems available on request on selected versions.

**JW SERIES**

Tipo pompa Pump type	Portata Volume		Pressione Pressure			Con riduttore With gearbox	Potenza Power		Peso Weight	Dimensions
	l/min	US Gpm	bar	Mpa	p.s.i.		hp	kW		
JW 32	135	35.7	300	30	4350	1500/1800/2200	105	77	239	756×589×415
JW 36	171	45.2	240	24	3480	1500/1800/2200	107	79	239	756×589×415
JW 40	211	55.7	210	21	3045	1500/1800/2200	115	85	239	756×589×415

Tipo pompa Pump type	Portata Volume		Pressione Pressure			Con riduttore With gearbox	Potenza Power		Peso Weight	Dimensions
	l/min	US Gpm	bar	Mpa	p.s.i.		hp	kW		
JW 45	267	70.5	155	15.5	2248	1500/1800/2200	107	79	239	756×589×415
JW 50	330	87.2	125	12.5	1813	1500/1800/2200	107	79	239	756×589×415
JW 55	399	105.4	100	10	1450	1500/1800/2200	104	76	239	756×589×415